



A unique solid, modern water cooler also available with a removable cold water tank, making this unit the perfect easy-maintenance long-term rental water cooler.

Nordik Product Features:

Rounded contemporary design,
Sturdy blow-moulded one-piece polyethylene cabinet – rust and dent resistant
Removable cold water tank (Cook and Cold model)

- *Cabinetry offered White
- *Waterways and cold water tank (Cook and Cold model) clean easily and are dishwasher safe
- *Standard-equipped with Float Guard^{MC} system to prevent defective bottles from leaking
- *High-flow faucets with readily removable nozzle for easy cleaning
- *Nozzle with twin-layer design to prevent fingers from touching area in contact with water
- *Cold water tank options Stainless Steel or Food-Grade Plastic
- *One-piece stainless steel hot tank
- *Dual action hot faucet for safer use
- *Large drip tray Large faucet alcove convenient for sport bottle fill-ups
- *Anchors for cup dispenser
- *Handle on back for easy portability
- *3-year limited warranty



120V / 60 hz 220V / 50 hz
120V : 1,4 A 220V: 0,8 A C/C
120V : 4,2 A 220V: 2,5 A H/C


A*

B

C

| Dimension | |
|-----------|------------------|
| A* | 142,8 cm 56" 1/4 |
| B | 76,2 cm 30" |
| C | 31,2 cm 12" 5/16 |

* Height with a 18-Liter bottle

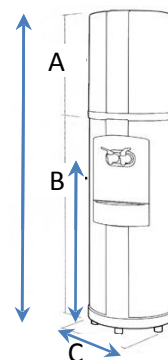

| Capacity | | | | | | | | | | | | |
|---------------------|-----|-------------------|-------|---------------------|--------|-------|------------------|-------|---------------------|-------------------|-------|----------------------|
| Ambient Temperature | | Cook & Cold Water | | | | | Hot & Cold Water | | | | | |
| | | Water 10°C(50°F) | | Cups/Hour 85g.(3oz) | Cook | | Water 10°C(50°F) | | Cups/Hour 85g.(3oz) | Water 74°C(165°F) | | Cups/Hour 170g.(6oz) |
| °C | °F | L.P.H | G.P.H | | L.P.H. | G.P.H | L.P.H | G.P.H | | L.P.H | G.P.H | |
| 21 | 70 | 6.7 | 1.8 | 79 | 18 | 5 | 3.8 | 1.0 | 45 | 7.7 | 2.0 | 45 |
| 27 | 80 | 4.7 | 1.2 | 55 | 18 | 5 | 1.8 | 0.5 | 21 | 8.0 | 2.1 | 47 |
| 32 | 90 | 2.6 | 0.7 | 31 | 18 | 5 | 1.1 | 0.3 | 13 | 8.5 | 2.2 | 50 |
| 38 | 100 | 1.8 | 0.5 | 21 | 18 | 5 | 0.7 | 0.2 | 8 | 9.4 | 2.5 | 55 |